SEREL®

Wall Hung WC Pan Hidden Assembly

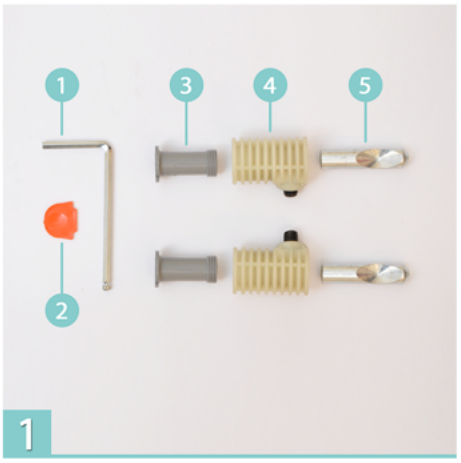

Assembly Group Parts
Parts 3,4 and 5 come pre-assembled on the product.

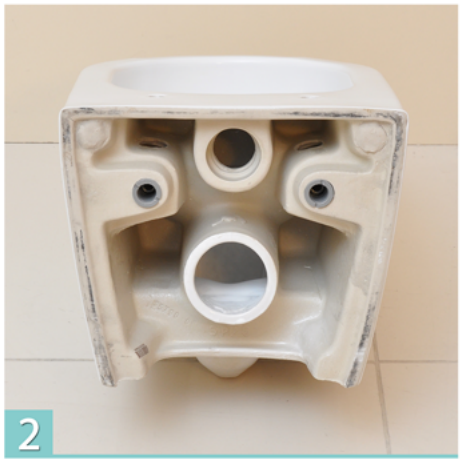

The parts of the mounting elements are pre-mounted. The product seems pre-assembled as in the picture.



The allen wrench (1) is loosened by passing through the set screw. Mounting element (5) is removed.

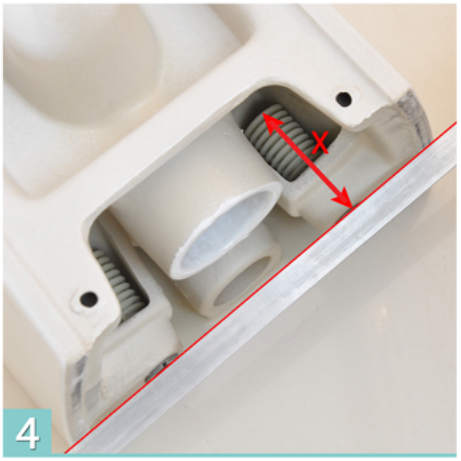

The "X" measure shown in the picture is taken from the product.

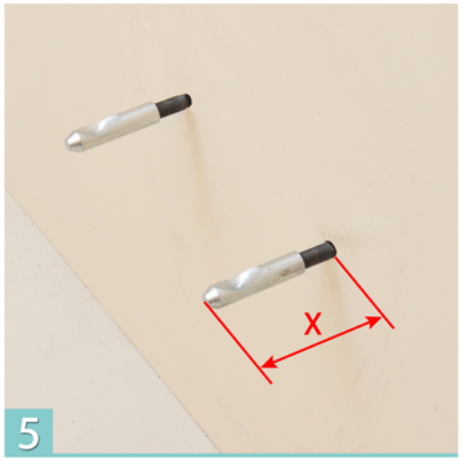

The dissassembled parts (5) are attached to the studs fixed to the recessed reservoir by adjusting the distance "X" as shown in the figure. Special grooves on stell part should face upward.



The toilet fits on steel parts (5) on the wall. Special grooves on steel parts should face upward.



The set screw tightened with the allen wrench (1) inserted through the seatcover mounting hole. The toilet is pulled towards the wall.



The assembly is completed.